

**ERGO·CONTROL**  
Programmable and manual positioners

**ERGO·CONTROL**  
Programmable and manual positioners

# The perfect position.

For the optimum working environment and maximised productivity



**ERGO**  
TRONIC

eC ErgoTronic AB • Elementvägen 6 • SE-820 41 Färila  
Telefon +46 (0)651-76 60 40 • Telefax +46 (0)651-230 30

[www.ergocontrol.com](http://www.ergocontrol.com)

The ERGO CONTROL positioners provide a very cost effective solution, by increasing both quality and productivity.

The main positioning arm is specifically designed to form an "L" shape, which allows any surface of the working area to be reached at all times with maximum ease and comfort.

### Easy to program

Simply move the work-piece to the next required position, press the "programming" button on the controller and the new position is stored in the memory. Repeat the procedure from position to position through to the end.


### Easy to operate

Each operation of the foot-pedal cycles the work-piece to the next stored position.

### Intrinsically safe

The double protection integrated safety system within our positioners ensure that no unexpected movements arise out of electrical power failures or surges.

- ✓ Increase productivity by 50% and more
  - Quick to set up
  - Easy to program
  - Maximising ergonomical positioning
- ✓ Improving efficiency in numerous applications such as, welding, grinding, assembly, inspection, Etc. Etc.
- ✓ Comes in 5 standard capacities 150, 300, 750, 1500 and 3000 KG
- ✓ 3 Axis' form, lift and two rotation axis
- ✓ 2 Axis' form, where the main arm is not required.
- ✓ Unlimited rotation (axis Y,Z)
- ✓ Standard arm lengths can be increased.
- ✓ Many options available.
- ✓ Programmable and manual use.

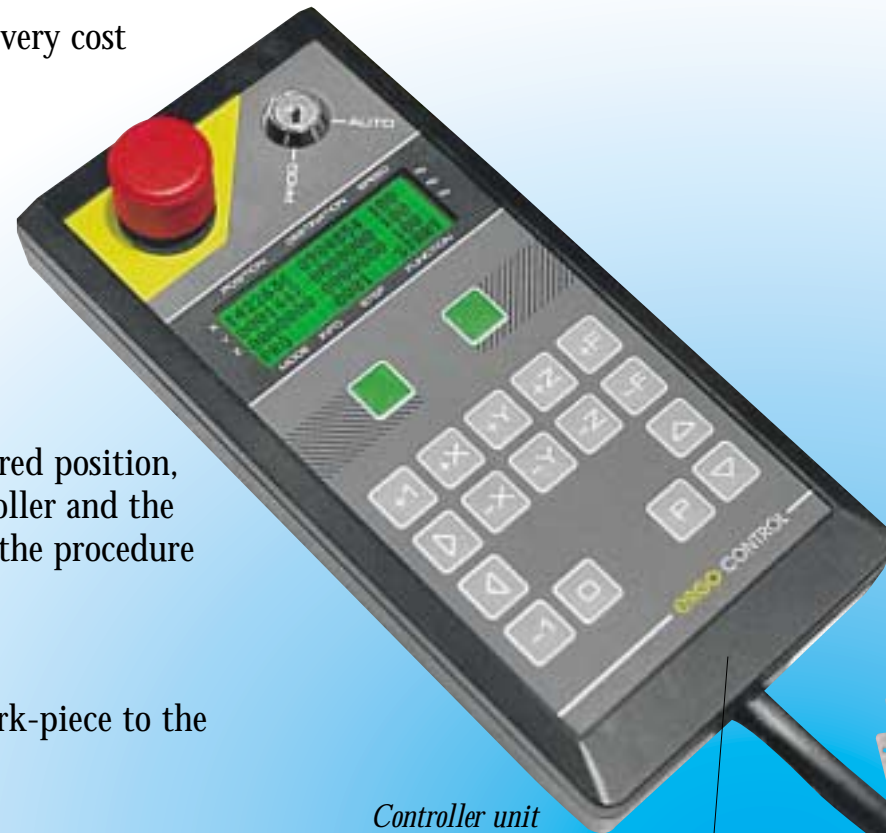

Controller unit for programming operation




Program controller with a capacity of 1000 step.



Controller unit for manual operation



The positioners can also be supplied in 2 Axis' form



Integral controller unit for model 150. machine



Capacity 150 kg



Capacity 300 kg



Capacity 750 kg



Capacity 1500 kg



Capacity 3000 kg

150

300

750

1500

3000